

**NORTON**





SAINT-GOBAIN






***clipper***<sup>®</sup>

# MASONRY SAWS



# MASONRY SAWS

 <p>Ø350 mm 110mm MAX CUT DEPTH 130mm MAX MATERIAL HEIGHT</p> <p><b>ELECTRIC</b> 3HP 2kW</p> <p>CST120 UNO</p>	 <p>Ø350 mm 110mm MAX CUT DEPTH 130mm MAX MATERIAL HEIGHT</p> <p><b>ELECTRIC</b> 3HP 2,2kW</p> <p>CST100/120</p>	 <p>Ø350 mm 110mm MAX CUT DEPTH 195mm MAX MATERIAL HEIGHT</p> <p><b>ELECTRIC</b> 3HP 2,2kW</p> <p>CST 150</p>	 <p>Ø400 mm 150mm MAX CUT DEPTH 280mm MAX MATERIAL HEIGHT</p> <p><b>ELECTRIC/PETROL*</b> 3HP 2,2kW 4HP 3kW 6,5HP* 4,8kW*</p> <p>CM401</p>
---	---	---	--

 <p>Ø500 mm 195mm MAX CUT DEPTH 355mm MAX MATERIAL HEIGHT</p> <p><b>ELECTRIC / PETROL*</b> 5,5HP 4,0kW 6,5HP* 4,8kW*</p> <p>CM501</p>	 <p>Ø500 mm 190mm MAX CUT DEPTH 355mm MAX MATERIAL HEIGHT</p> <p><b>ELECTRIC</b> 7,5HP 5,5kW</p> <p>ISM/ISC</p>	 <p>Ø650 mm 265mm MAX CUT DEPTH 280mm MAX MATERIAL HEIGHT</p> <p><b>ELECTRIC / PETROL*</b> 3HP 2,2kW 6,5HP 4,8kW 7,5HP* 5,5kW*</p> <p>JUMBO 651</p>	 <p>Ø900/1000** mm 370/420** mm MAX CUT DEPTH 440mm MAX MATERIAL HEIGHT</p> <p><b>ELECTRIC / PETROL*</b> 10HP 7,5W 13HP* 9,6kW*</p> <p>JUMBO 900/1000</p>	 <p>508mm MAX CUT DEPTH 508mm MAX MATERIAL HEIGHT</p> <p><b>ELECTRIC</b> 2,5HP 1,85kW</p> <p>CB511</p>
--	--	--	---	---



# ISM/ISC SUPER

## FEATURES

- Water distributors connectable to optional water supply system
- Extended operating handle
- Crank controlled cutting depth adjustment
- Cutting head height setting by foot pedal and handle (ISM)

## BENEFITS

- Wet cutting and dust free working conditions
- Optimum cutting pressure application
- Easy and accurate setting
- Maximum user comfort

### ISM 3.75.3

Item No	701846 13985			
EAN 13 Code	5450248 231239	7,5HP	5,5kW	400v

Supply Voltage/ Power kW	400V 3~ / 5,5kW (7,5Hp)
Fuse/Generator	32 amp / 14 kVA
Blade x bore (mm)	Ø 500 x 25,4
Tool speed RPM	2062 min-1
Max. cutting depth (mm)	190
Max. cutting length (mm)	500
Flat table size (optional) (mm)	465 x 615
Tilting table (optional) (mm)	455 x 580
Hand Arm Vibrations	< 2,5 m/s <sup>2</sup>
Sound power / pressure level	99 dB (A) / 85 dB (A)
Dimensions (LxWxH) (mm)	1400 x 760 x 1750
Weight	248kg

### ISC 3.75.3

Item No	701846 13986			
EAN 13 Code	5450248 144861	7,5HP	5,5kW	400v

Supply Voltage/ Power kW	400V 3~ / 5,5kW (7,5Hp)
Fuse/Generator	32 amp / 14 kVA
Blade x bore (mm)	Ø 500 x 25,4
Tool speed RPM	2062 min-1
Max. cutting depth (mm)	190
Max. cutting length (mm)	750
Flat table size (optional) (mm)	710 x 615
Tilting table (optional) (mm)	710 x 610
Hand Arm Vibrations	< 2,5 m/s <sup>2</sup>
Sound power / pressure level	99 dB (A) / 85 dB (A)
Dimensions (LxWxH) (mm)	1650 x 760 x 1750
Weight	280kg

## PRODUCT FEATURES



MAX CUT DEPTH

### IMPORTANT

Conveyor carts, dust collectors and water supply system are available as accessories. See selection chart page XX




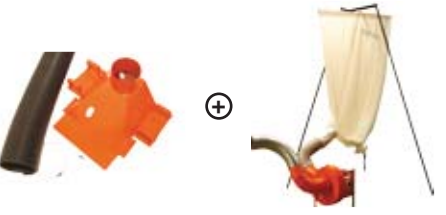





EXTREME UNI SILENCIO - 71084630309



REFRACTORY - SEE RECOMMENDATION TABLE

## HOW TO SELECT ISC AND ISM MASONRY SAWS AND ACCESSORIES

MAX. CUTTING LENGTH	FLAT OR MITRE CUT?	DRY OR WET CUTTING?	
		WET	DRY
<b>ISM</b> UP TO 500mm 	 <b>Tilting table 0 to 45°</b> ISM: 3100 04702 ISC: 3100 04539	 <b>Water distribution kit</b> 3100 04732	 <b>Hood</b> 3100 04552 + <b>Dust extractor bag type</b> 3100 04544
<b>ISC</b> UP TO 750mm 	 <b>Flat conveyor cart</b> ISM: 3100 04704 ISC: 3100 04703	- - - - -  <b>Dust extractor cabinet type</b> 3100 04536	

